

PRODUCT DATA SHEET



Hyperguard Max

Art no: HV-NXC3157



Art no:	HV-NXC3157
Size:	7-12
Materials:	HPPE, Steel, Glass Fiber, Basalt, Nitrile
Packaging:	12/120
Standard:	EN420, EN388:2016
Category:	II



CATEGORY: II



EN388:2016



4X43F



Properties

Seamless and flexible cut resistant glove (Level F) in a HPPE mix. Sandy Grip technology nitrile coating in the palm and over the fingertips for excellent oil resistance and durability. Butadiene free. The rugged surface gives excellent grip in dry, wet or oily conditions. Ergonomically designed liner for a comfortable glove with great breathability and firm fit.

Material information

Knitted cutter glove in the highest level (Level F). Nitrile Coating in the inner hand with Sandy Grip technology.

How to read the pictogram:


Technical facts: Intermediate design (category II)

For areas of specific risks, i.e. mechanical risks. These products will have been CE type tested against European EN388:2016 test methods and certified by a notified body. The testing is done for abrasion resistance, cut resistance, tear resistance, puncture resistance, extended cut resistance and impact protection. The maximum score for each level are; abrasion 4, cut resistance 5, tear resistance 4, puncture resistance 4, extended cut resistance F (X if not applicable) and impact protection (optional test) P if approved. Evaluate the importance of each of the properties and how it applies to you as a user.

EN388:2016



a b c d e f

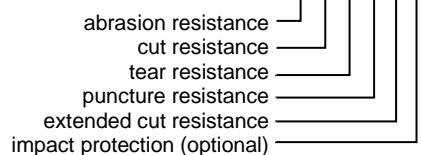

Soft Touch AB

Postal address Gamla Alingsåsvägen 24, 433 38 Partille, Sweden

Phone: +46 (0)31-548050 Fax: +46 (0)31-531005 Email: info@softtouch.se Website: www.softtouch.se